



*



A40A



CT370-2

There really is nothing quite so useful as a small, compact Cleantec machine that provides the combination of a powered liquid supply and efficient wet pick-up facility... all incorporated in one unit.

Mainly used in the cleaning of carpets and upholstery these machines can be equally effective on hard floors where there is a need for localized scrubbing and wet pick-up operation.



Twinflo'


The power head is to the full Twinflo' specification ensuring excellent performance but, in addition, has incorporated as standard our Powerflo' pump system and quick release fluid connector. The container system is to our unique "tank within a tank" design ensuring as compact a total package as possible.

A range of accessory kits are available to cover all applications.

** Also available CTT370-2 with transparent container*

Motor	Power	Airflow	Suction	Dry	Wet	Ext	Range	Weight	Size
1200W	230V AC 50/60Hz	40 L/sec	2500mm	15L	9L	6L	26.8m	8.8Kg	355 x 355 x 510mm

Our exclusive, easily applied happy face is supplied with each machine, one look tells you it really does make all the difference. Also available 115V/120V specification.

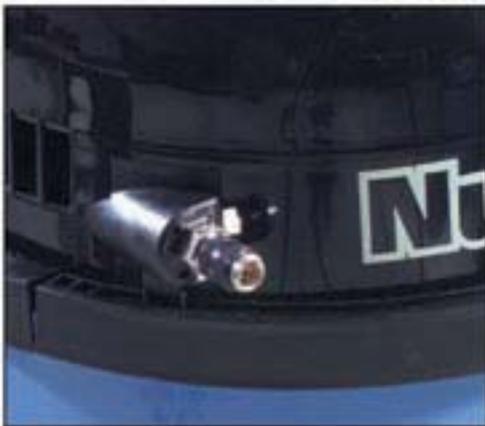

CT470-2

The CT-470 is the bigger brother to the 370 with double its capacity for those that need more operational time between filling and emptying to cover larger areas.



Twinflo'

The power head incorporates the high performance Twinflo' bypass motor and Powerflo' pump system ensuring efficient discharge and liquid collection.

The container system is our unique "tank within a tank" design providing for clean and dirty water within one compact size.

The full accessory kit provides for both carpet and upholstery cleaning with optional additional accessories for hard floor, wet or dry pick-up facilities.

*** Also available CTT470-2 with transparent container**

Motor	Power	Airflow	Suction	Dry	Wet	Ext	Range	Weight	Size
1200W	230V AC 50/60Hz	40 L/sec	2500mm	27L	20L	11L	26.8m	12.0Kg	358 x 450 x 710mm

Also available 115V/120V specification.



CT570-2 CTD570-2

The 570 series has become the most popular contractors' extraction cleaner by choice... and this is not by chance, but by design.

The full Structofoam construction is designed to take the bangs



Twinflo'

and bruises that any machine will suffer in true commercial use because that's what you need - a machine that's construction is beyond reproach and will give you years of reliable service.

The Structofoam 570 is available in both one and two-motored models built to the full Twinflo' specification and incorporating our Powerflo' pump and quick connect liquid system.

The containers are also full Structofoam incorporating our unique "tank within a tank" system to maintain a compact and usable size.

The full accessory kit provides for both carpet and upholstery cleaning with optional additional accessories for hard floor, wet or dry pick-up facilities.

Model	Motor	Power	Airflow	Suction	Dry	Wet	Ext	Range	Weight	Size
CT	1200W	230V	40 L/sec	2500mm	23L	15L	10L	26.8m	16.2Kg	415 x 415
CTD	2400W	AC 50/60Hz	80 L/sec	2500mm	23L	15L	10L	26.8m	18.4Kg	x 645mm

Also available 115V/120V specification.



CT900-2 CTD900-2

When describing the Cleantec 900 we have called it the "truck-type" machine because it is built like a truck yet is as easy to handle as any of the Cleantec range.

The all Structofoam construction leaves little to be desired, being rugged yet light in weight, and with oversized wheels and castors you can move it easily over all surfaces, or up and down stairways. The 900 is our largest machine to incorporate the compact "tank within a tank" design, allowing for use in confined areas.

The 900's come in two models, one-motored or two-motored, both incorporating our Twinflo' bypass motors and integrated Powerflo' pump system. The pump system injects the cleaning solution deep into the carpets in a continuous deep cleaning cycle and these bigger machines will cover an area more than three times that of our smaller machines, without the need for emptying. The unique tipper system incorporated within the chassis design allows for the machine to be emptied in floor drains or WC's where available, and this is especially important in office blocks and high rise apartment blocks.

The full accessory kit provides for both carpet or upholstery cleaning, with optional kits and accessories available for hard floor cleaning and wet and dry pick-up.

Model	Motor	Power	Airflow	Suction	Dry	Wet	Ext	Range	Weight	Size
CT	1200W	230V	40 L/sec	2500mm	40L	32L	17L	26.8m	23.0Kg	800 x 490
CTD	2400W	AC 50/60Hz	80 L/sec	2500mm	40L	32L	17L	26.8m	25.5Kg	x 880mm

Also available 115V/120V specification.

TwinPac 570-2

The system is split into two parts:- the powered 30-litre solution bucket and the 15-litre twin motored extraction bucket. But being two parts they are easy to handle especially where dirty water must be disposed of in a sink or WC... you simply empty the bucket... and for the clean water you simply fill the bucket as required... never easier!



Part 1
30 litres

Part 2
15 litres

A twin 10-metre quick release solution and power cable (the umbilical we call it) joins the two together coupled with our deep clean extraction kit completes this truly versatile package.

Operation is simplicity itself, by virtue of the system being in two parts you position both units in the area to be cleaned, fill the solution tank, it then stays conveniently out of the way, you connect the extraction machine to the solution tank (the umbilical again), attach the kit and you are ready to go. A cleaning range of 26-metres after which you can move the solution unit on its castors and cover another 26-metres. Extraction performance gives you an amazing 90%+ liquid recovery substantially reducing drying time... this really is "Good News"!

During the cleaning cycle the extraction dirty water tank must be emptied once when full but, being so convenient, it takes no time at all. (For a larger extraction machine see information on the TP-930).

Big Machine Performance with Little Machine Convenience.

TPD-570 Accessory Kits



A50



BB50

The TPD-570 System

Part 1	Power	Pressure	Flow	Capacity	Cable	Weight	Size
	230V AC 50/60Hz	58psi/ 4 bar	2L/Min	30L	10.0m	12.5Kg	415 x 415 x 645mm

Part 2	Motor	Power	Airflow	Suction	Capacity	Range	Weight	Dimensions
	2400W	230V AC 50/60Hz	80 L/sec	2500mm	15L	26m	15.8Kg	415 x 415 x 645mm